


SWI916TS

Cascadable

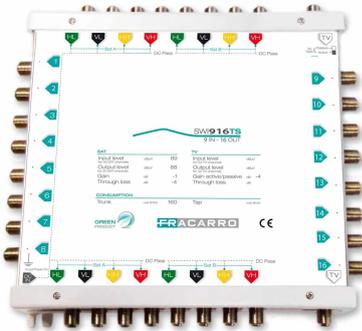

9-input cascadable multiswitch with 16 output taps; DIP switch to select active and passive TV gain.

Technical Chars

- Satellite band up to 2300MHz.
- **High output level** to cover long cable distances(**60m** with 6.7mm cable).
- Each port has an LED to show correct reception of DiSEqC commands.
- Return channel included when TV gain is passive (5-65MHz).
- **When TV gain is passive, the product is fully powered by the receivers**, the power supply only serves to power the active TV gain, other amplifiers and LNBs.
- **PSU1215TS external power supply** (12V, 1.5A) with Male Jack connector (2.1x5.5x12; inside positive, outside negative) **not included in the package**; to optimise installation space and reduce maintenance time.
- Small size due to matrix switching system, with connectors on both sides.
- Easy to install due to standard input colouring

SWI916TS		
Code		287362
Inputs		8 SAT, 1 TV
Outputs		8 SAT, 1 TV
Taps		16
SAT		
Bandwidth	MHz	950-2300
Gain	dB	-3/1
Max Output level	dBµV	100
Insertion loss	dB	-1/-5
TV		
TV bandwidth	MHz	Active TV: 47-862; Passive TV: 5-862
Gain (Active)	dB	-4
Gain (Passive)	dB	-24
Max Output level	dBµV	Active: 95
Insertion loss	dB	-3/-4.5

Return channel		
Bandwidth	MHz	Passive TV: 5-65
Consumption		
Tap	mA	50
Absorption	mA	Active TV: 160@12V; Passive TV: entirely fed by the receiver
Maximum power supply current SAT	mA	Passive TV: 1500; Active TV: 1340
Specifications		
Operating temperature	°C	-10 to +55
SAT-SAT Isolation	dB	>30
Dimensions and packaging		
Pieces		1
EAN code		8016978097104
Packaging dimensions	mm	195 x 200 x 53
Product dimensions	mm	175 x 190 x 41
Packaging weight	kg	0.547
Net Weight	kg	0.645
Weight	kg	0.645