


PLC 1x8

Splitters

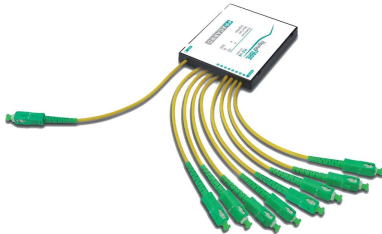

8-way optical partition suitable for building ROEs, with planar waveguide technology enabling **very low insertion losses**.

Suitable for low-cost, high-performance optical distribution, it is suitable for use in countless installation types.



Technical Chars

- SC/APC connectors
- Very high return loss
- 1 m patch cords
- Compact design

PLC 1x8		
Code		287407
Input		1
Outputs		8
Connectors		SC/APC - SC/APC
Insertion loss	dB	<10.9
Return loss	dB	>55
Isolation	dB	>40
Wavelength input	nm	1260-1650
Fiber type		Single-mode 9/125
Sheath		G657 A1
Fibre length	m	1
Connector type		Simplex
Specifications		
Operating temperature	°C	-20 to +55
Conformity		EN50581:2012
Dimensions and packaging		
Pieces		1
EAN code		8016978099511
Packaging dimensions	mm	240 x 200 x 20
Product dimensions	mm	90 x 100 x 20
Single gross weight	kg	0.125

