


## DS-2CE56D1T-VPIR HD1080p Vandal-Resistant IR Dome Camera


### TurboHD™

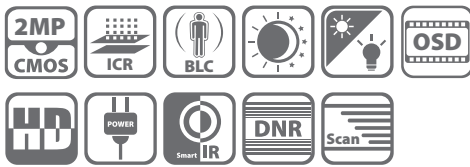

### Key Features

- HD1080p Video Output
- HD-TVI Technology
- True Day/Night, Smart IR
- Up to 65 Feet IR Range
- IK10 Vandal Resistance
- OSD Menu Controlled via UTC

### Dimensions

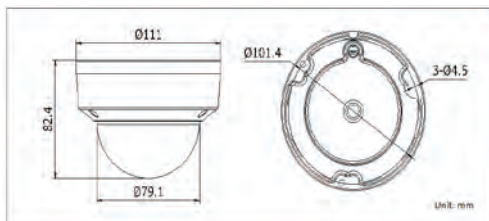

### Accessories



Video Balun  
DS-1H18

### Order Models

DS-2CE56D1T-VPIR

DS-2CE56D1T-VPIR	
<b>Camera</b>	
Image Sensor	2 MP CMOS image sensor
HD-TVI Resolution	1920 x 1080
Minimum Illumination	Color: 0.034 @ f/2.2, B/W: 0.0034 @ f/2.2, 0 with IR
Shutter Speed	1/30 s to 1/50,000 s
Lens	2.8 mm, 3.6 mm, 6 mm optional Angle of view: 90° (2.8 mm), 80° (3.6 mm), 55.4° (6 mm)
Lens Mount	φ14
Angle Adjustment	Pan: 0° to 355°, tilt: 0° to 75°, rotation: 0° to 355°
Day/Night	ICR
Synchronization	Internal synchronization
Video Frame Rate	1080p @ 30 fps
HD Video Output	1 analog HD output
S/N Ratio	More than 52 dB
<b>Menu Settings</b>	
AGC	Supported
D/N Mode	Color/BW/EXT
White Balance	Auto/manual
BLC	Supported
Other	Digital noise reduction, mirror image
<b>General</b>	
Operating Conditions	-40° C to 60° C (-40° F to 140° F) Humidity 90% or less (non-condensing)
Power Supply	12 VDC
Power Consumption	Maximum 3 W
IR Range	65 feet
Impact Protection	IK10
Communication	Up-the-Coax Protocol: HIKVISION-C
Dimensions	Φ111 mm × 82.4 mm (Φ4.37" × 3.24")
Weight	550 g (1.21 lbs.)