

## Tetra bumper Antenna




### Electrical Data

<b>Frequency Range (MHz)</b>	380 - 400
<b>Pre-Tuned Bands</b>	S1
<b>Bandwidth @ 1.5:1 VSWR</b>	10%
<b>Gain: Isotropic</b>	2dBi
<b>Compared with ¼ wave</b>	0dB
<b>Impedance</b>	50 Ohms
<b>Polarisation</b>	Vertical
<b>Configuration</b>	Single Patch


### Mechanical Data

<b>Dimensions (mm)</b>	<b>Height</b>	140
	<b>Width</b>	100
	<b>Depth</b>	4 (including Adhesive Pad)
<b>Weight (g)</b>		
<b>Operating Temp (°C)</b>		-40° / +80°C
<b>Material</b>		Black Engineering Plastic
<b>Colour</b>		Black
<b>Cable</b>		
<b>Length (m)</b>		5
<b>Diameter (mm)</b>		5
<b>Type</b>		URM76 Coax Cable

Antenna Positioning

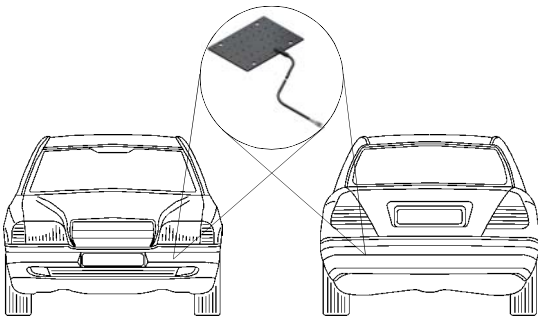

390 MHz

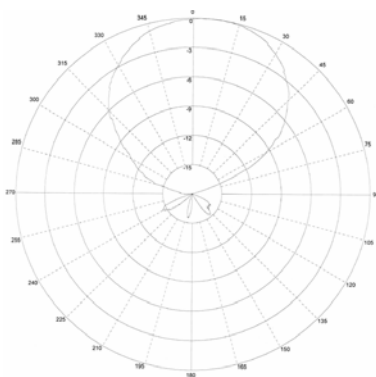

VSWR v Freq (MHz)

