

MAGNUM Exterior LED Lightbar


Center speaker now available!

Best-in-class versatility to meet your departmental needs and budgets.

Available only in Europe.



EMG2000

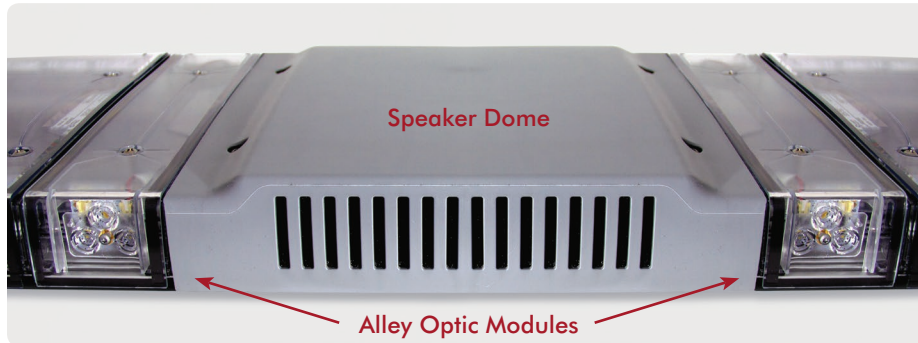

INPUT VOLTAGE RANGE	10-16 Vdc or 10-30 Vdc
NUMBER OF LEDS AND MAXIMUM CURRENT DRAW @ 12.8 VDC	
Inboard Warning Modules	3 LED Single Color: <0.5 Amp; 6 LED Single Color: <1.0 Amp or 12 LED Dual Color: <1.0 Amp
Corner Modules	6 LED Single Color: <1.0 Amp or 12 LED Dual Color: <1.6 Amp
Takedowns	3 LED: <0.42 Amp; 6 LED: <0.84 Amp or 9 LED: <1.26 Amp
Alley	3 LED: <0.42 Amp
NUMBER OF LEDS AND MAXIMUM WATTAGE @ 12.8 VDC	
Inboard Warning Modules	3 LED Single Color: <3.2 Watts; 6 LED Single Color: <6.4 Watts or 12 LED Dual Color: <6.4 Watts
Corner Modules	6 LED Single Color: <6.4 Watts or 12 LED Single Color: <10.2 Watts
Takedowns	3 LED: <2.7 Watts; 6 LED: <5.4 Watts or 9 LED: <8.1 Watts
Alley	3 LED: <2.7 Watts
FLASH PATTERNS	Warning 21, Takedown 5, Alley 5, Arrow L/C/R 4 and Arrow Warning Solid 9 or Split 17
OPERATING TEMPERATURE	-40° C to +65° C / -40° F to +149° F
DIMENSIONS	
Lengths	Available in 42" (107 cm), 48" (122 cm) or 54" (137 cm)
Height	2.3" (5.8 cm)
Depth	12.3" (31.2 cm)
MOUNTS	Headache mount or Low profile fixed mount
OPTIONS	Rear split arrow is available with 6 or 12 LED dual color modules
CERTIFICATIONS	ECE R10-4 EMC certified; ECE R65 Category T, Class 1 certified (amber) and ECE R65 Category T, Class 2 certified (red and blue)
WARRANTY	Five-year

Contact your sales representative for additional information.

PO Box 206 / 3900 Central Parkway
Hudsonville, MI 49426

800.338.7337 / 616.896.7100
Fax 616.896.1226 / Order fax 616.896.1286