

APPROVED LED BEACONS FEUX A LED HOMOLOGUES

CRYSTAL LED - CRYSTAL 8X LED



CRYSTAL LED - CRYSTAL 8X LED

V 12÷24	⚡	IP 66	°C -30 +50	On ∞	PC
			r.p.m.		A
ECE R65 TB1 (E3)00 7070			130±10	LED	V12: 0,9 A
ECE R65 TA1 (E3)00 7070			130±10	LED	V24: 0,45 A
EMC 2006/28/CE [e3] 03 1184					BV
			Flash/min.		A
ECE R65 TB1 (E9)00 1320			130±10	8X LED	V12: 1,7 A
ECE R65 TA1 (E3)00 7105			130±10	8X LED	V24: 0,8 A
ECE R65 TR1 (E3)00 7105			130±10	8X LED	
EMC 2006/28/CE [e3] 03 1201					BV




kg 0,53

CRYSTAL LED A CRYSTAL 8X LED A



CRYSTAL LED B CRYSTAL 8X LED B

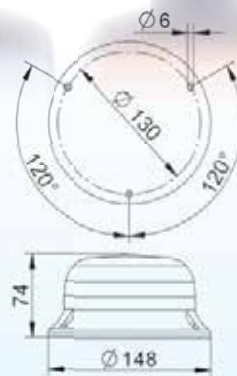

kg 0,39

part no. code	type type	voltage tension	colour couleur
36419	CRYSTAL LED A	V12/24D	7
36420	CRYSTAL LED B	V12/24D	7
36426	CRYSTAL 8X LED A	V12/24D	7
36427	CRYSTAL 8X LED B	V12/24D	7
36457	CRYSTAL 8X LED A	V12/24D	3
36458	CRYSTAL 8X LED B	V12/24D	3

- Beacon with polycarbonate dome and aluminium base
- LED light source - rotating (CRYSTAL LED) or flashing effect (CRYSTAL 8X LED)
- Synchronization with more DIN B devices (B base versions) switched on simultaneously (max. 8 devices)
- 8X DIN B base versions: cruise light available
- Magnetic versions also available (CRYSTAL LED M - CRYSTAL 8X LED M): see page 24

- Feu de signalisation avec dôme en polycarbonate et base en aluminium
- Source lumineuse à LED à effet tournant (CRYSTAL LED) ou flash (CRYSTAL 8X LED)
- Synchronisation entre plusieurs dispositifs (base B) allumés en même temps (max. 8 feux)
- Version 8X avec base DIN B : disponible avec lumière de croisière
- Disponible en version magnétique (CRYSTAL LED M - CRYSTAL 8X LED M) : page 24