

**AMBER**/agriline

signaling & lighting for agricultural machinery

# NEW EUROROT LED

LED BEACON FLASHING EFFECT



CE  
R10  
R65

MADE  
IN ITALY



#morethanbrightideas

**SIRENA**



**EUROROT LED FLX**  
FLEXIBLE ISO A  
(MOUNT ON  
ADAPTER SOCKET)

- > ECE R65 APPROVED <
- > LOW CONSUMPTION <
- > EXCELLENT OPTICAL PERFORMANCE <
- > VERSATILE SOLUTIONS <



## ALSO AVAILABLE



**EUROROT LED B**  
ISO B1 BASE  
(FLAT BASE)



**EUROROT LED A**  
ISO A BASE  
(MOUNT ON  
ADAPTER SOCKET)



**EUROROT LED P**  
ISO C BASE  
(M12 SINGLE BOLT  
FIXING BASE)



**EUROROT LED M**  
(MAGNETIC BASE,  
HELIX CABLE AND  
CIGARETTE  
LIGHTER PLUG)



**EUROROT LED MV**  
(MAGNETIC BASE,  
SUCTION PAD,  
HELIX CABLE AND  
CIGARETTE LIGHTER PLUG)

## EUROROT LED | PART NO

**EUROROT LED**  
(FLASHING EFFECT)  
12/24V

ISO B1  
ISO A  
ISO C  
M  
MV  
FLX

75290  
75291  
75292  
75293  
75294  
75295

## EUROROT LED

new

Approved beacons with polycarbonate dome. Fibreglass reinforced polyamide bases.

FLX: vibration proof thermoplastic flexible base and unbreakable polycarbonate dome.

Developed with LED technology, flashing effect.

## KEY CHARACTERISTICS

**VOLTAGE**  
12/24V DC

**LIGHT EFFECT**  
FLASHING EFFECT

**LIGHT INTENSITY**  
According to ECE R65

**PROTECTION GRADE**  
IP65

**OPERATING TEMPERATURE**  
-30/+50 °C

## MECHANICAL FEATURES


EUROROT: polycarbonate dome (screw in mount) and fibreglass reinforced polyamide bases

EUROROT FLX: vibration-proof flexible EPDM base (according to ISO 4148, standard form A) and unbreakable polycarbonate dome

## OPTICAL FEATURES

Optical unit made up of 6 LEDs producing a flashing effect enhanced by the metallized reflector

## DRAWINGS, DIMENSIONS AND WEIGHTS

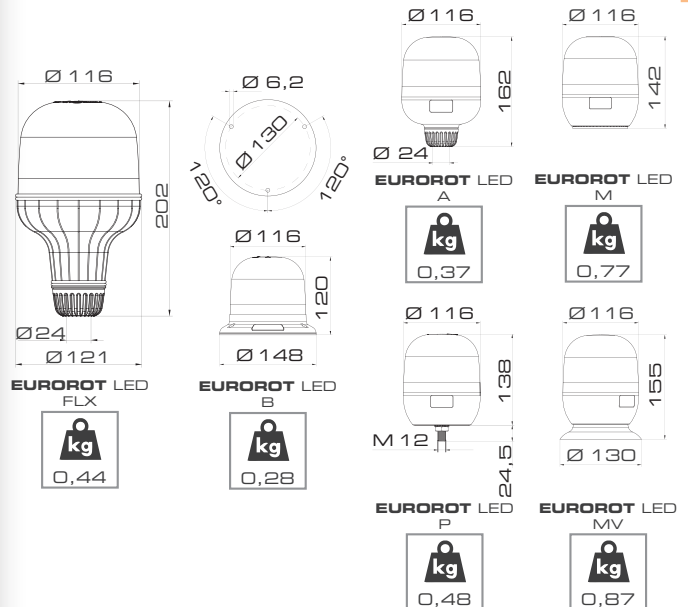

## CERTIFICATIONS



## HOMOLOGATION NUMBERS

**EUROROT LED**  
(FLASHING EFFECT)

ECE R65 TA1 E3 007204  
EMC UNECE 10R E3 05 1248 (12/24V)