



**EUROROT FLX**  
FLEXIBLE ISO A  
(MOUNT ON  
ADAPTER SOCKET) **new**

- > ECE R65 APPROVED <
- > EXCELLENT OPTICAL PERFORMANCE <
- > VERSATILE SOLUTIONS <



### ALSO AVAILABLE



**EUROROT B**  
ISO B1  
(FLAT BASE)



**EUROROT A**  
ISO A BASE  
(MOUNT ON  
ADAPTER SOCKET)



**EUROROT P**  
ISO C BASE  
(M12 SINGLE BOLT  
FIXING BASE)



**EUROROT M**  
(MAGNETIC BASE,  
HELIX CABLE AND  
CIGARETTE LIGHTER PLUG)



**EUROROT MV**  
(MAGNETIC BASE,  
SUCTION PAD,  
HELIX CABLE AND  
CIGARETTE LIGHTER PLUG)

### EUROROT | PART NO

	EUROROT (ROTATING BEACON)	
	12V (WITH BULB)	24V (WITH BULB)
ISO B1	75262	75263
ISO A	75260	75261
ISO C	75281	75282
M	75264	75265
MV	75268	75269
FLX	75266	75267

## EUROROT

Approved rotating beacons with polycarbonate dome. Fibreglass reinforced polyamide bases.

FLX: vibration-proof thermoplastic flexible base and unbreakable polycarbonate dome.

Developed with halogen light source H21W.

### KEY CHARACTERISTICS

#### VOLTAGE

According to the installed bulb and positioning of the drive belt  
12V DC (with bulb)  
24V DC (with bulb)

#### MOTOR

Ultra silent drive belt technology  
Rotation through ball bearing  
Radio interference filter integrated in the motor

#### LIGHT INTENSITY

According to ECE R65

#### PROTECTION GRADE

IP55

#### OPERATING TEMPERATURE

-30/+50 °C

### MECHANICAL FEATURES


EUROROT: polycarbonate dome (screw in mount) and fibreglass reinforced polyamide bases

EUROROT FLX: flexible EPDM base (according to ISO 4148, standard form A) and unbreakable polycarbonate dome

### OPTICAL FEATURES

Metallized polycarbonate reflector. Halogen light source H21W allowing high optical performances as well as low power consumption

### DRAWINGS, DIMENSIONS AND WEIGHT

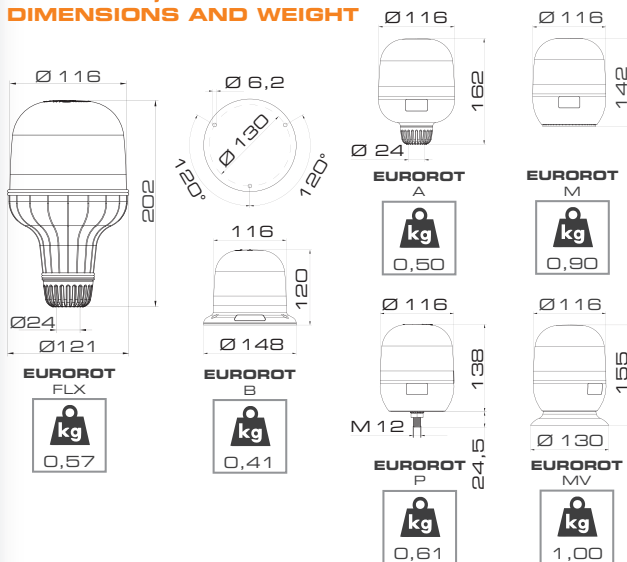

### CERTIFICATIONS



### HOMOLOGATION NUMBERS

EUROROT (ROTATING BEACON)	
ECE R65 TA1 E3	007141 A
EMC UNECE 10R E3	03 1207 (12V)
EMC UNECE 10R E3	03 1207 (24V)