




> ECE R65 APPROVED <
> LOW CONSUMPTION <
> EXCELLENT OPTICAL PERFORMANCE <

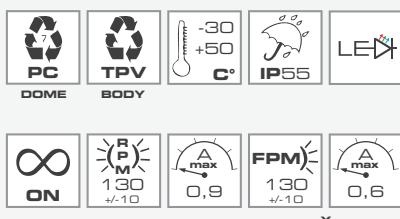

GDO LED

Approved LED beacons. The aerodynamic shape with strong hold magnetic base, allows adhesion at a speed of 200 Km/h and over.

Developed with LED light source, the beacon is available with rotating (GDO R LED) or flashing effect (GDO X LED).

Available:

- with helix cable and cigarette lighter plug (SAC) or
- with helix cable and 90° coaxial jack

KEY CHARACTERISTICS

VOLTAGE
12/24V DC

LIGHT EFFECT
ROTATING EFFECT (GDO R LED)
FLASHING EFFECT (GDO X LED): selectable 1F/2F

LIGHT INTENSITY
According to ECE R65

PROTECTION GRADE
IP55

OPERATING TEMPERATURE
-30/+50 °C

MECHANICAL FEATURES


Unbreakable polycarbonate dome and strong hold magnetic rubber base

OPTICAL FEATURES

GDO R LED: optical group made up of 8 LED allowing a high intensity rotating effect

GDO X LED: one LED optical group producing a rich light output for flashing effect

DRAWINGS, DIMENSIONS AND WEIGHT

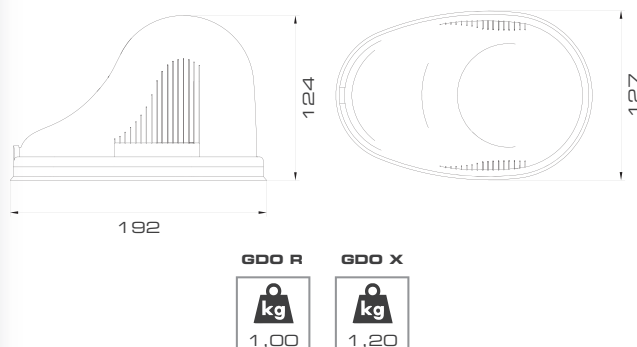

GDO LED | PART NO

	GDO R LED (ROTATING EFFECT)	GDO X LED (FLASHING EFFECT)
	12/24V	12/24V
	A	A
SAC	74508	74534
JACK	74509	74532

CERTIFICATIONS



HOMOLOGATION NUMBERS

	GDO R LED (ROTATING EFFECT)	GDO X LED (FLASHING EFFECT)
ECE R65	TA1 E3	00 7072 A
EMC 2006/28/CE	e3	03 1183