



## XT SLIM SERIES LED



The XT Slim Series LED warning light is an enhancement of the well proven XT Series. It has even higher performance LEDs designed to offer maximum performance with a slimmer lens giving exception warning and is available with three, four or six high-intensity LED's.


### Models

| PART NO.      | VOLTAGE | CAT X R65 | COLOUR | MOUNT   |
|---------------|---------|-----------|--------|---------|
| XT3SA-DVR65   | 10-30   | Class I   | Amber  | Surface |
| XT3SB-DVR65   | 10-30   | Class I   | Blue   | Surface |
| XT3SR-DVR65   | 10-30   | Class I   | Red    | Surface |
| XT3SW-DV      | 10-30   | N/A       | White  | Surface |
| XT4SA-DVR65C2 | 10-30   | Class II  | Amber  | Surface |
| XT4SB-DVR65C2 | 10-30   | Class II  | Blue   | Surface |
| XT4SR-DVR65C2 | 10-30   | Class II  | Red    | Surface |
| XT4SW-DV      | 10-30   | N/A       | White  | Surface |
| XT6AA-DVR65   | 10-30   | Class I   | Amber  | Surface |
| XT6SBB-DVR65  | 10-30   | Class I   | Blue   | Surface |
| XT6SRR-DVR65  | 10-30   | Class I   | Red    | Surface |
| XT6SWW-DV     | 10-30   | N/A       | White  | Surface |

### Features and Benefits

- Three, Four and Six high-intensity LEDs options available
- Multiple heads are synchronisable
- Colourless when not illuminated
- 8 Sensible flash patterns, including 3 R65 approved, Steady burn and alternating options
- Operating Voltage: 10-30VDC
- Current Consumption: XT3S - 0.5A @ 12VDC, 0.3A @ 24VDC, XT4S/6S - 0.9A @ 12VDC, 0.45A @ 24VDC
- R65 Class II Cat X Approved (Blue, Amber & Red only)
- R10.05 Approved and IP67 Rated
- 5 Year LED Warranty

### Dimensions

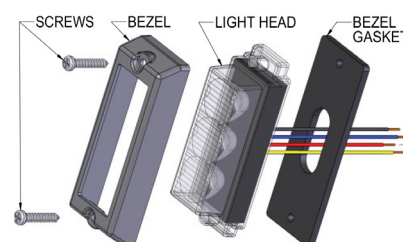

### Flash Patterns XT3 (8)

- R65 Double Flash PH1 \*
- R65 Double Flash PH2
- R65 Single Flash PH1
- R65 Single Flash PH2
- R65 Quad Flash PH1
- R65 Quad Flash PH2
- Steady Burn
- Triple Flash (75FPM) PH1
- Triple Flash (75FPM) PH2
- Single Flash (75FPM) PH1
- Single Flash (75FPM) PH2
- Double Flash (75FPM) PH1
- Double Flash (75FPM) PH2
- Quad Flash (75FPM) PH1
- Quad Flash (75FPM) PH2
- Off

### Flash Patterns XT4 / XT6 (12)

- R65 Double Flash PH1 \*
- R65 Double Flash PH2
- R65 Single Flash PH1
- R65 Single Flash PH2
- R65 Quad Flash PH1
- R65 Quad Flash PH2
- Steady Burn
- Triple Flash (75FPM) ALT
- Triple Flash (75FPM) PH1
- Triple Flash (75FPM) PH2
- Single Flash (75FPM) ALT
- Single Flash (75FPM) PH1
- Single Flash (75FPM) PH2
- Double Flash (75FPM) ALT
- Double Flash (75FPM) PH1
- Double Flash (75FPM) PH2
- Quad Flash (75FPM) ALT
- Quad Flash (75FPM) PH1
- Quad Flash (75FPM) PH2
- Off

\* default flash pattern