

BT CITY

Intercom Communication & Entertainment System

• Instruction Guide



INDEX

Midland BTCity	2
Charging batteries	3
Description of the unit and installation brackets.....	3
Switching your Midland BTCity on and off.....	5
Adjusting the volume.....	5
Operative Mode	5
Priority	5
Pairing to other Bluetooth devices.....	6
Resetting all paired devices.....	9
Special configurations.....	10
Pairing to a BT Remote.....	10
Recommendations for specific uses	11
Use at your own risk	13
Warranty.....	13

Midland BTCity (from vers. firmware 14.03.13)

Thank you for purchasing the Midland BTCity, the wireless intercom multimedia system for bikers. The Midland BTCity is designed to be fitted directly on to your helmet and to be used for communications with Bluetooth devices like mobile phones, GPS Sat-Navs and MP3 players. If desired, it can also be paired with another Midland BTCity unit and used as wireless Rider/Pillion Intercom system or Rider to Rider in bike-to-bike mode, within a maximum range of 200 meters. The Midland BTCity is also supplied with a wired connection that can be used to connect an iPod/MP3 player or PMR446 transceiver, which will then enable bike-to-bike communications up to a maximum range of 5 km.

Midland BTCity is available in two versions:

- › Single BTCity Intercom kit with one unit only
- › BTCity Intercom TWIN with two units

Depending on the model purchased, the package contains the following parts:

BTCity

- › 1 BTCity communication unit
- › 1 audio kit with two stereo speakers, microphone with boom and wire microphone
- › 1 plate with bi-adhesive strip to fix the unit onto the helmet
- › 1 clamp to fix the unit onto the helmet
- › 1 stereo audio cable to connect an iPod/ or other models of MP3 players
- › 1 miniUSB wall-mounting power supply
- › Wind Suppressing Foam Microphone Cover, Allen key and Velcro strip for assembly

BTCity TWIN

- › 2 BTCity communication units
- › 2 audio kits with two stereo speakers, microphone with boom and wire microphone
- › 2 plates with bi-adhesive strip to fix the unit onto the helmet
- › 2 clamps to fix the unit onto the helmet
- › 2 stereo audio cables to connect an iPod/ or other models of MP3

players

- › 1 miniUSB wall-mounting power supply with double plug
- › Wind Suppressing Foam Microphone Cover, Allen key and Velcro strip for assembly

The units included in the TWIN kit are already paired and can therefore be immediately used in the Intercom mode.

Technical specifications of Midland BTCity

General:

- › Bluetooth ver. 2.1 stereo (Headset/Handsfree/A2DP protocol)
- › AGC system automatically controls the volume in relation to background noise
- › Voice (VOX) or manual communications option
- › Manual controls to enable: telephone, intercom and wire connection
- › Fully waterproof
- › Lithium battery with 8 hours talk time
- › Recharge time: app. 4 hours

Bluetooth connections:

- › Identical device for Rider to Pillion or Bike-to-Bike Intercom mode, up to a maximum range of 200 meters
- › With BT Remote for easy to use handlebar commands
- › Bluetooth devices
 - Mobile phone with MP3 player Stereo (A2DP protocol), GPS (specific for motorbike)
 - PMR446 transceivers (with built-in or external Bluetooth connection) for group bike-to-bike communications

Wire connections:

- › For stereo audio input (iPod/MP3 player)
- › For PMR446 transceivers (with optional cable)

Attention: before using BTCity for the first time, remember to recharge it for at least 5/6 hours.

Attention: Midland BTCity is designed to withstand rain and water. However, if it is raining, always verify that the rubber caps protecting the sockets are fully fitted.

Charging batteries


Make sure that the unit is fully charged before use. Allow at least 5/6 hours for a full charge before using the unit for the first time. Normally, after the first time, it takes 4 hours for a full charge.

Charge the unit by inserting the wall-charger into the charging socket (lift the rubber cover to insert the plug).

- › The red LED on the unit will start flashing when charging begins.
- › Allow the headset to charge until the blu LED turns on.
- › When the charge is complete (blu LED on), release the headset from the charger.

Attention: *everytime the mini USB recharging plug is inserted, the device is automatically turned off. To use it while it is in charge, you should turn the device on with the plug already inserted.*

Description of the unit and installation brackets




The BTCity has 3 multifunction buttons and 3 wired connections in the lower section.

Description of the button features:

- › Control: can be used to enable/disable the intercom and manage mobile phone features

- › Volume+: enables you to increase the volume
- › Volume -: enables you to decrease the volume

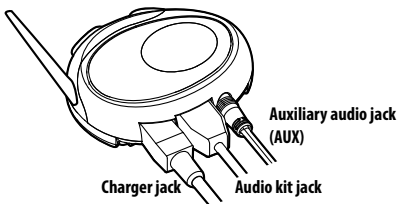

Description of the wired connections

- › Charger jack: enables to recharge the unit using a standard mini USB power supply and firmware upgrade via PC connection
- › Audio kit jack: enable to connect an audio kit (stereo headset and microphone)
- › Auxiliary audio jack (AUX): can be used to connect an audio source, like a stereo iPod/MP3 player or PMR446 transceiver

Description of the audio kit

The audio system includes two ultra-flat stereo speakers and two interchangeable microphones, which are both supplied with a bracket and wire connection.

Fixing the stereo speakers

The two stereo speakers have a Velcro/adhesive strip that aids their fixing to your helmet.

The microphone can be fixed onto the helmet in two ways:

Boom Microphone

Place the section with the Velcro/adhesive strip between the padding and the rigid cover of the helmet, so that the microphone is correctly positioned in front of your mouth and that the white symbol is facing your mouth. This type of microphone is suited for Open Faced and Flip Front helmets.



Wire microphone

Using the Velcro/adhesive strip, place the microphone inside the helmet in front of your mouth. This type of microphone is more suited for Full Faced helmets. The mini connector on the microphone allows you choose the microphone that best suits the helmet you are using.



Audio kit jack



The audio kit must then be connected to the central jack of the Midland BTCity unit using the “L” shaped connector.

Description of the installation brackets

The Midland BTCity can be fixed onto the helmet in two different ways: By either using the plate with bi-adhesive strip, or the clamp. These methods allow you to safely “fix” the BTCity unit onto your helmet and to remove it at any time in order to recharge or store it.

Plate with bi-adhesive strip

The fixing plate has a bi-adhesive strip on one of its sides. To fix the plate in place, clean the application area on the helmet surface, remove the bi-adhesive film and place the fixing plate on the helmet by keeping it contact with the surface for a few seconds.

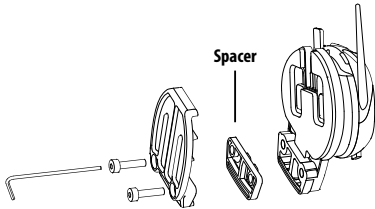


Clamp

Using the Allen Key, loosen the two screws on the clamp and place the rear plate between the helmet padding and the external rigid protection. Then, tighten the two screws in order to firmly fix the clamp in place. Inside the clamp is included a small plastic spacer, that can be removed to close tighter the clamp.

Fitting and removing your Midland BTCity

The BTCity can be easily fitted onto the helmet by sliding it downwards so that it fits into the slot of the selected fixing device (plate with bi-adhesive strip or clamp). BTCity is maintained in position thanks to the fixing clip located on the upper section (A).



To detach the BTCity, simply press the fixing clip and push the unit upwards.

Switching your Midland BTCity on and off

Switching the unit on:

- › Press and hold “Control” button down for approximately 3 seconds until the BLUE indicator lights.

Switching the unit off:

- › Press and hold both “Control” and “VOL-” buttons together for approximately 3 seconds until the RED indicator flashes 3 times, thus lessening the chances that you might turn off the unit accidentally (especially whilst wearing heavy gloves).

Adjusting the volume

Your Midland BTCity uses AGC technology, which automatically adjusts the listening volume in relation to background noises.

However, it is also possible to manually adjust the volume by means of the “Volume+” and “Volume-” buttons.

Attention: *volume can be adjust only when an audio connection is active.*

Operative “mode”

The BTCity can operate in two main “mode”: Intercom and Phone. The function button on the unit can have different functionality depending on which mode the unit is at that moment.

- › In “**Intercom mode**” the “Control” button lets you manage the communication.
- › In “**Phone mode**” you can manage your Bluetooth cellular phone to place/answer a phone call or to listen to the music (in stereo mode). Please use your phone responsibly and safely.

You can switch (toggle) from one mode to the other simply pressing the Middle button for 3 seconds. A voice announcement will tell in which mode you are on.

The toggle sequence is the following:

- › **Intercom mode** (if another unit has been paired)

- › **Phone mode** (if a phone has been paired)

Every time you turn on the unit, the default mode is Intercom (if it was previously paired to another unit), otherwise it will be Phone (if it was paired to a phone).

If you need to know in which mode the unit currently is, just press the “Volume +” and “Volume -” button together for 3 second. A voice announcement will tell you the current mode.

Priority

The BTCity manage the different connection/audio sources based on the following priority rules.

Changing of the operative mode

Every time you change mode (long press of the middle button to toggle between Intercom/ Phone), the previous audio is closed and the control goes to the new mode.

Intercom

The Intercom has always a higher priority against the music (including Phone/GPS in music play mode). Every time you open the intercom the music from a Bluetooth source is stopped. Only the audio/Music from the “AUX wired connection” is always in background by default.

Phone calls

The phone call has always the higher priority and will interrupt every connection, like music, intercom. Only the AUX wired connection can be still on if the setting “Wired connection always in background” was enabled.

GPS voice announcement

When the GPS is paired to the “Volume +” button, (high priority) the street voice announcement will always interrupt the intercom.

When paired using the “Volume -” button, (lower priority) the voice announcement are always in background also if the intercom is active.

AUX wired connection


Music or audio from the AUX wired connection, by default it is always in the background also when the intercom is open or during a phone call. It is possible to change this beaver following the procedure described in the “Setup and Special configuration” chapter.

Pairing to other Bluetooth devices

The BTCity unit can be paired to other Bluetooth devices, like Phone, GPS Navigator or PMR446 Radio with built-in or external Bluetooth.

The pairing procedure must be done using the “Volume +” or the “Volume -” buttons.

- › **Pairing to the “Volume +” button:** for Phone with music (A2DP stereo).
- › **Pairing to the “Volume -” button:** for GPS navigators and other devices which the audio must be always in background.



Attention: The “Volume -” button does not support the pairing with a phone and do not support A2DP Stereo Music.

Using the telephone features

The cellular phone can be paired only to the “Volume +”, in this way it is possible to manage all the phone functionalities and listen to the stereo music. An incoming call has the higher priority, that means all other communications will be closed (Intercom, Music).

Pairing the unit with a mobile phone

1. Enable the Bluetooth device search feature on your mobile phone. As this procedure varies according to the brand and model of the mobile phone, refer to the manual supplied to your particular phone for further information.
2. Press and hold down the middle button about 7 sec., until the Red light is on permanently (setup mode). Now press for 3 seconds the “Volume +” button, the Blue and Red light will flash.
3. After a few seconds the mobile phone will display “Midland BTCity”. Select it and follow the instructions provided in your mobile phone manual to accept the pairing. When prompted, enter the pairing code, which is 0000 (four zeroes). Your mobile phone should then display a confirmation message if the pairing operation has been successfully completed
4. The BTCity will automatically exit the set up mode (red indicator on) and go to the working mode (blue light flashing).

Answering a call

When you hear the phone ring, you can answer in two different ways:

Vocally:

Simply say one word to answer the call and start talking.

Manually:

Tap the “Control” button and start speaking.

Rejecting a call

If you don’t wish to answer, you can let the mobile phone ring or press the “Control” button for 3 seconds (you will hear one audio confirmation tone).

Making a call

There are several ways to make a call.

From the mobile keypad:

- › Dial the number on the mobile keypad:
- › Press “Send” on the mobile phone.

To redial the last number:

- › Press and hold “Volume+” button for 3 seconds in order to redial the last number (you will hear one audio confirmation tone).

To make a voice call:

- › Press “Volume-” button for 3 Seconds. If your mobile phone supports voice calls, you will be asked to speak the name of the contact you wish to call.

Priority: Calls have a high priority, which means that all other communications are temporarily disabled when a call arrives and automatically re-enabled once the call ends.


Ending a call

There are several ways to end a call:

- › Wait for the called person to end the call.
- › Press the “Control” button for 3 seconds (you will hear an audio confirmation tone).
- › Press “End” button on the mobile phone.

Using the MP3 player feature of the mobile phone

Many mobile phones are now designed to be used as stereo MP3 players. The BTCity device fully supports the A2DP and AVRCP protocols that enable you to listen to stereo music and remotely control your mobile phone’s MP3 player. You can even use the buttons on the BTCity unit to control the following play options: Play, Pause, Forward and Backward.



Available controls:

- › **To play/pause music:** click the “Control” button.
- › **To skip forward to the next song:** keep pressed the “Volume+” button.
- › **To skip backward to the previous song:** keep pressed the “volume-” button.

Priority: the music listening mode has the lowest priority. Therefore, it will always be disabled when another type of communication is enabled.

Pairing to a GPS navigator

The GPS can be paired to the “Volume +” or “Volume -” button. If the GPS is paired on “Volume +”, the street voice announcement will interrupted all the other communications (Intercom, Music). If the GPS is paired on “Volume -” all the street announcement will be in background (and will not interrupted the Intercom communications).

Attention: *If you need to connect both Phone and GPS, you must pair the GPS to the “Volume +” button and the Phone to the GPS it self (not anymore to the “Volume -” button).*

Attention: *remember to switch off all the other Bluetooth device, only the two devices involved in the pairing must be turned on.*

GPS Navigator with stereo music player

If the GPS is also a stereo MP3 player and you want to listen to stereo music, you must pair the GPS to the "Volume +" button. In this configuration the GPS street voice announcements will interrupt all other communication (Intercom, Music).

When the GPS is paired to the "Volume +" button the "Phone" mode is activated.

Attention: It is possible to listen A2DP Stereo music from the GPS only in "Phone Mode".

How to pair the BTCity to a GPS

In general is possible to pair the BTCity to all the GPS for motorbike that support Bluetooth headset connection.

To pair the BTCity to a GPS, you must first enter the setup mode:

1. Turn off the unit
2. Press and hold down the "Control" button about 7 sec., until the Red light is on permanently.
3. Now press firmly (3 sec) the "Volume +" or "Volume -" button, the Blue and Red light will flash.
4. Enable the Bluetooth device search feature on your GPS
5. After some seconds, "Midland BTCity" will be displayed on your GPS.
6. Follow the pairing procedure of your GPS. If a pin code is requested you must enter "0000" (four times zero).
7. When successfully paired, the Blue light of the unit will be on for one second and then the unit will exit the setup mode and switch to the working mode (the Blue light will start flashing).

You can now use your BTCity and the GPS street voice announcement are always in background.

If you pair the GPS to the Volume + button (because for example the "Volume -" button was already used), you loose the possibility to pair the phone to the BTCity unit. You can overcome this limit by pairing the phone directly to the GPS and then the GPS to the BTCity unit. All the phone features are therefore managed by the GPS itself.

How to use a GPS

When paired using the "Volume -" button the GPS will be automatically connected and the voice announcement are always in background also if the intercom is active.

When the GPS is paired to the "Volume +" button, the street voice announcement will always interrupt the intercom. In addition, remember to switch to "Phone" mode in order to listen and control the music (play/pause - backward and forward).

If the phone is connected through the GPS you must use the control buttons on the GPS screen in order to control the phone functionality.

Using the intercom feature

To use the Intercom feature, be sure both BTCity units are turned on and previously paired together.

The two units supplied in the Midland BTCity TWIN Pack, are already paired and ready for use, which means that it is not necessary to perform this procedure.

If the devices are not part of the same pack, or one of the BTCity units has been purchased separately, you need to pair them in order to be able to use the Intercom function.

Pairing with another BTCity device

1. Turn off the unit. Press and hold down the middle button about 7 sec., until the Red light is on permanently.
2. Press the "Control" button on the first unit until the RED and BLUE lights begin to flash rapidly and alternately.
3. Then press the "Control" button on the second unit until the RED and BLUE lights begin to flash rapidly and alternately.
4. Now both BTCity units are trying to pair to each other.

When successfully paired, the blue led of each device will light for 1 sec and go back to setting mode (red light always on) waiting for additional pairing or setting procedures.

5. To use the two devices, exit the setting mode: Double click on the "Control" button. The red light will quit and the blue light will begin to flash. Now you can use your BTCity.

Intercom

The Intercom feature can be enabled in two ways:

Manual activation:

- › Press “Control” button, on one of the two units. Communication is enabled and remains active until you press the “Control” button again. You will hear 1 audio tone when the Intercom feature is enabled and 2 audio tones when it is disabled.

Voice activation (VOX):

- › This is enabled by default. To start an Intercom communication, simply start talking. The communication will remain active for all the time you are talking.
- › If there is no conversation, the Intercom is automatically closed after 40 seconds.

Attention: If needed, you can disable the VOX feature simply by pressing the “Volume -” button for 3 sec. A voice announcement will advise you when the VOX is disabled. To turn the VOX on again, just press the same button and a voice announcement will advise you that the VOX is now active. This setting is remembered also in you turn off the unit.

How to pair the BT City to previous BT line unit

The BTCity is compatible with all the BT line unit from Midland. You can pair the BTCity to a BT2, BT1, BTX1, BTX2 or BTNext unit and the max distance of the intercom is defined from the lower possible.

To pair the BTCity to another BT line unit, you must first enter the setup mode:

1. Turn off the unit
2. Press and hold down the “Control” button about 7 sec., until the Red light is on permanently.
3. Now press long (3 sec) the “Control” button, the Blue and Red light will flash.
4. Follow the procedure on the other unit’s instruction manual (normally you can use the “Volume +” button on all the previous BT line units like BT1-BT2).
5. When successfully paired, each unit will have the Blue light on for one second and than go back to the setup mode (Red light always on).

If you don’t have more devices to pair, you must exit the setup mode from both units before you can use them: for BTCity double click on the “Control” button, the Red light will turn off and the Blue light will start flashing. For the other devices of BT line, please refer to their own user manual.

Resetting all paired devices

Sometimes you may find it necessary to delete all the pairing references stored in the BTCity unit (reset operation).

- › To perform this operation, first switch off the BTCity and than keep pressed the control button. The red led turns on.
- › Simultaneously press and hold down the “Volume +” and “Volume -” buttons for 3 seconds. The Blue Light will be lit on for 1 sec.

This procedure deletes all the paired Bluetooth devices stored in the memory and it is therefore possible to start a new “clean” pairing session.

Using the wired audio input

Your Midland BTCity is also supplied with a wired audio input (labeled AUX), that can be used to connect an audio source, like an iPod (or any other MP3 Player) or a PMR446 transceiver for communications in group or for a coverage increase.

Priority: the wired audio input has the lowest priority when compared to the other Bluetooth connections (including the Intercom) and will therefore always be disabled when another Bluetooth communication is opened.

Using a i-Pod/MP3 Player

Listening to music

To listen to music from the wired input, connect the audio source using the cable supplied with the BTCity unit. The volume level is automatically adjusted by the AGC system, which means that you only need to adjust the volume of your iPod/MP3 player to a level that will allow you to listen to music in normal speed.

Attention: never set the volume of the MP3 Player to the maximum possible.

Hint: We recommend that you perform a few tests adjusting the volume of your iPod/MP3 player so at the normal speed the Headset volume is suited to your needs. The AGC system will automatically increase the volume on higher speed. Make a note to remember this setting for future trips.

Attention: the volume adjustment, (“Volume+” and “Volume –”) buttons, cannot be used to adjust the volume of the wired audio source(eg MP3 player).

Enabling/disabling the wire input

The wire input can be enabled and disabled

- › Enabling: double click the “Control” button (you will hear one audio confirmation tone).
- › Disabling: double click the “Control” button (you will hear two audio confirmation tones).

Using a Two Way Radio transceiver

To be able to use the transceiver, it is necessary to purchase a specific cable (sold separately) in order to connect the radio to your Midland BTCity:

Some manufacturers radios use a different pin configuration, so we recommend that you ask your dealer as to which cable is best suited to your needs.

To communicate via the attached radio, press the transmission Press To Talk (PTT) button to speak and release it to listen. It is not possible to talk and listen simultaneously. Communications can be activated also without pushing the PTT button, by enabling the VOX function.

Special configurations

Some Midland BTCity features can be configured to suit specific needs:

- › *Pairing to BT Remote*
- › *Adjusting/ Disabling the VOX feature (Intercom and telephone)*
- › *Wired connection always on*

Pairing to a BT Remote Unit

When paired to a BTRemote unit, you will have available all the 5 buttons of the remote unit:

When you are in “Intercom” mode

- › Press short the “Control” button to open /close the intercom

When you are in “Phone” mode

- › Press short “Forward” button: voice dial/answer incoming call
- › Press long “Forward” button: dial last number/reject incoming call
- › Press short “Control” button: Play/Pause music

When the music is playing:

- › Press short “Forward” button: forward a song
- › Press short “Backward” button: backward a song
- › Press short “Control” button: Play/Pause music

In all mode (Intercom or Phone)

- › Press long “Backward” button: enable/disable wired AUX input
- › Press very long “Backward” button (7 sec.): enable/disable Vox

Adjusting/ Disabling the VOX feature (Intercom and telephone)

The Intercom feature can be enabled both manually and vocally (VOX). The VOX activation is influenced by the background noise and therefore by the speed.

For optimum results, it is possible to choose one of the following four microphone sensitivity levels: high, medium, low and very low. The default setting of BTCity is “high”. It is also possible to disable the VOX feature in order to activate the Intercom and phone call answering features in manual mode only.

Adjusting the sensitivity of the microphone (VOX)

1. Enter the Setup mode: Switch your BTCity off.
Press and hold down the central button (Control) until the red indicator switches on permanently. Your BTCity is now in “Set up mode”.
2. Press the “Volume+” and “Control” buttons till the red indicator

will turn to steady blue.

3. Now, press "Volume +" or "Volume -" to increase or reduce sensitivity. Every time you press the Volume buttons the RED light will flash for confirmation. When you reach the end of the upper and lower limit, the RED light will not flash.
4. Double press the "Control" button; the Blue light will flash several times, in order to let you know the selected sensitivity:
 - once = VOX disabled
 - Twice = low sensitivity
 - 3 times = Normal sensitivity
 - 4 times = high sensitivity
 - 5 times = very high sensitivity
 - Default = high sensitivity
5. The light indicator is now back to steady RED ("Set up mode") and the changes are confirmed
6. If needed, you can adjust again the sensitivity repeating the steps from point 2, otherwise exit the Setting mode by double clicking the "Control" button. Once the red light turns off, the blue led starts blinking. Now you can use your BTCity.

Disabling the VOX feature (Intercom and telephone)

Follow all the procedure described in the previous steps and choose the option 1 (VOX disabled). You will see the blue led blinks once.

Wired connection always on

This feature let you keep the wired connection always on, even when the phone or the intercom is open. This feature can be useful when you connect a PMR446 transceiver.

Enabling:

- › Enter the "Setup" mode.
- › Press the "Volume+" and "Volume -" buttons for one second. The blue LED will flash once.
- › To exit the "Setup" mode double press the "Control" button.

Disabling:

- › Follow the same procedure up described; now the blue LED will flash three times
- › To exit the "Setup" mode double press the "Control" button.

Recommendations for specific uses

The section that follows, provides a few useful suggestions on how to achieve maximum performance from your BTCity unit.

Using a PMR446 transceiver

To be able to use the transceiver, it is necessary to purchase a specific cable (sold separately) in order to connect the radio to your Midland BTCity:

- › Some manufacturers radios use a different pin configuration, so we recommend that you ask your dealer as to which cable is best suited to your needs

To communicate via the attached radio, press the transmission Press Top Talk (PTT) button to speak and release it to listen. It is not possible to talk and listen simultaneously. The cable connected to the transceiver has a PTT button that can be placed on the handlebar of your bike or held in your hand (If you are the pillion rider).

Adjust the volume of the transceiver to your needs, remembering that the volume adjustment is controlled by the automatic AGC system and that it will therefore be automatically increased in relation to background noise.

If you wish to use a PMR446 transceiver for group communications and simultaneously maintain the Intercom feature enabled between two BTCity devices, you must remember that the Intercom feature is enabled every time you speak by means of the BTCity's VOX feature. Consequently, radio communications will be disabled whilst you are talking with somebody, because they have a lower priority compared to Intercom communications.


This can be prevented by enabling the "Wired connection always on" or "Disabling the VOX feature" (both explained in the previous section).

Disable the VOX feature, as explained in the previous section, to make sure that the intercom will not automatically be activated when you speak on the PMR446. To enable the Intercom feature when using this configuration, you will have to press "Control" button manually.

Using the BTski Audio Kit accessory (optional)

This optional kit is the Bluetooth solution designed for winter sports (use without helmets or with semi rigid type ski helmets). The audio system is made up of two ultra thin stereo speakers and a boom mike, all contained in a soft material lining

The audio system includes two ultra-flat stereo speakers and one microphone with boom, all assembled into a earwarmer headset.




Fitting and removing your Midland BTCity

The BTCity can be easily fitted by sliding it downwards so that it fits into the slot of the fixing device.

BTCity is maintained in position thanks to the fixing clip located on the upper section (A).


To detach the BTCity, simply press the fixing clip and push the unit upwards.



Using the BTCity without helmet

After have fixed your BTCity on its suitable tool and have inserted the audio kit plug into the central socket, wear your earwarmer headset


as shown in the figure. Please, be sure to have placed the microphone in the right way, with the white sign oriented towards your mouth.




Using the BTCity with a semi-rigid helmet

To place the BTCity into a semi-rigid helmet you should first of all remove the little triangular pads, used to cover the ears in most of helmets on sale, and then put your helmet directly on the earwarmer headset audio system.

Be sure the BTCity unit is placed between the two "V" shapes strap.



If your helmet is not equipped with the two removable pads, you could anyway mount your BTCity system by using the supplied Velcro-band. Be sure to fix the Velcro-band as shown in the figure.

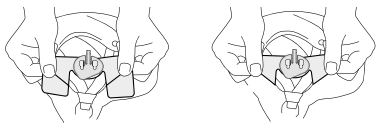

Now, fix the BTCity on the Velcro-band. Wear your headset, insert the connection cable of the headset into the BTCity device and wear the helmet.



Use at your own risk

The use of the headphone-headset will impair your ability to hear other sounds and others around you.

Listening to music or speaking on a telephone may prevent you from hearing others around you and distract you from riding safely. The use of such headphone-headset while riding or skiing may endanger you and others, and its use, in some areas, could not be allowed.

Using this headset at a high volume may result in permanent hearing loss.

If you experience ringing in your ear or any other hearing related pain, reduce the volume or discontinue using this device. With continued use at high volume, your ears may become accustomed to the sound level, which may result in permanent damage to your hearing.

Please use this device at a safe volume level.

Warranty

Midland will repair or replace, at its option without charge, any BT CITY/EVA device which fails due to a defect in material or workmanship within TWO Years following the initial consumer purchase. In the event of a product defect, please return it to the authorized customer service or to the Manufacturer himself.

To make use of this warranty, it is necessary to return to the authorized service centre:

- › The affected product (or accessory)
- › The original proof of purchase, which clearly indicates the name and address of the seller and the date and place of purchase.

This warranty does not apply to accidents of any kind, exposure to pressure, extreme temperatures (outside of -10°C to 55°C), submersion water damage, battery leak or abuse.

This warranty does not include the cost of labor for removal or re-installation of the product.

European CE Notice Certification and Safety Approval Information

This product is CE marked according to the RTTE Directive (99/5/EC) and is free use in all the EU countries.

Users are not permitted to make any changes or modifications to the device.

Modifications which are not expressly approved by the producer invalidate the warranty card.

For further information, please go to our website

www.cte.it



- All articles displaying this symbol on the body, packaging or instruction manual of same, must not be thrown away into normal disposal bins but brought to specialised waste disposal centres. Here, the various materials will be divided by characteristics and recycled, thus making an important contribution to environmental protection.
- Alle Artikel, die auf der Verpackung oder der Gebrauchsanweisung dieses Symbol tragen, dürfen nicht in den normalen Mülltonnen entsorgt werden, sondern müssen an gesonderten Sammelstellen abgegeben werden. Dort werden die Materialien entsprechend ihrer Eigenschaften getrennt und, um einen Beitrag zum Umweltschutz zu liefern, wiederverwertet.

	EC Certificate of Conformity (to EC Directive 99/5 -2004/108- 2006/95/EC)	DO: 7.1.4.4
		Rev: 5
		Authorised on: 02/02/2010
		By: S. Peterlin
		Signature: <i>S. Peterlin</i>



DECLARATION OF CONFORMITY N° 2013111905 Rev 4

Manufacturer: C.T.E. International S.r.l.
Address: Via Sevardi 7 –ZONA INDUSTRIALE MANCASALE – 42124 REGGIO EMILIA

Products Name: **BT CITY**
Product Type: **BLUETOOTH HEADSET INTERCOM**
Brand : **MIDLAND**

The product described above is in conformity with the following Specifications based on sample testing:

Item of 99/05/CE	Standard	Title	Edition or date of issue
3.1a	EN 60065 :2002 +A1 :2006+A11 :2008 +A12 :2011	Audio, video and similar electronic apparatus - Safety requirements	2002
3.1.a	EN 50371	Generic standard to demonstrate the compliance of low power electronic and electrical apparatus with the basic restrictions related to human exposure to electromagnetic fields (10 MHz - 300 GHz) - General public	2002
3.1.b	EN 301 489-1	Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements	V.1.9.2
3.1.b	EN 301 489-17	Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment; Part 17: Specific conditions for Broadband Data Transmission Systems	V.2.2.1
3.2	EN 300 328	Electromagnetic compatibility and Radio spectrum Matters (ERM); Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz ISM band and using wide band modulation techniques; Harmonized EN covering the essential requirements of article 3.2 of the R&TTE Directive	V1.8.1

Supplementary information to the conformity assessment result on which the declaration is based:
Conformity assessment procedures are referred to art. 10(4) linked with Annex III of Directive 1999/5/EC. The test sample fulfils the requirements specified above, on the basis of test result and their evaluation. The product herewith complies with the essential requirements of EC Directive 99/05/EC, 2004/108/EC and following implements and modifications, 2006/95/EC and following implements and modifications, 93/97/EC. Reference to any marking or other indication (e.g. on the product) is exhibited in attachment to this declaration.

Reggio Emilia, 19/11/2013

CTE International srl
Responsible of Quality Assurance
Giovanni Bo

This document is owned by Cte International srl. It is forbidden to reproduce or diffuse it without the authorisation of the Quality Assurance Manager of CTE International srl.